


Oil Mist Separator AOM/AOS

Clears all types of haze

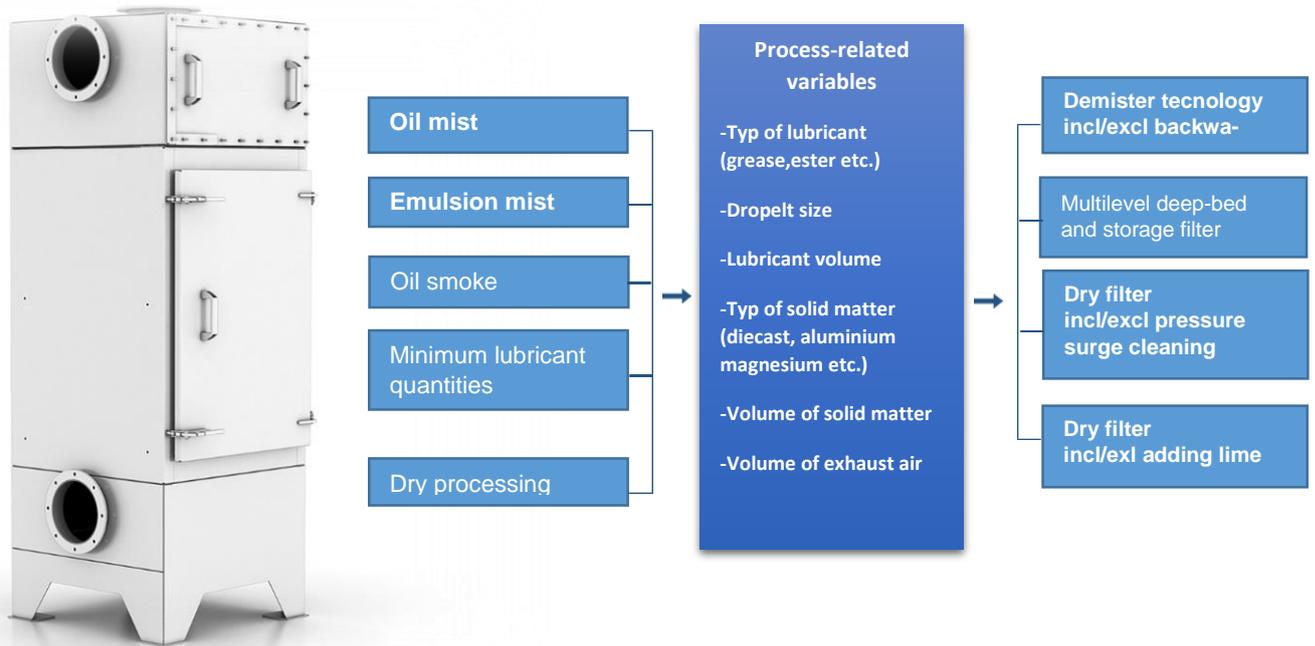

The bg filtration gmbh offers a custom range of filter-types for seperating droplets and emulsions, as encountered in metal processing, drilling, cutting, honing, grinding, etc. With these manufacturing processes, varying quantities of various cooling materials and lubricants are used, which in turn create varied spectra of drops.

These fluids blend together with the metals taht are tob e processes a multitude of implementation combinations. For these countless applications, bg filtration gmbh has developed a filter program with demister tecnology (which can be with or without backwa-sching) and multi-level storage and dry filters.

Application in various industrail sectors

- Machining causing the seperation of shavings such as drilling, turning, milling, honing, polishing, etc.
- Shaving-free reshaping such as rolling, deep-drawing, pressing, etc.
- Machine tool manufacturing
- Machining centres
- Rolling mills for metals and mouldings
- Metal machining

Advantages

- Maximum filtration capacity even with droplets < 1µm
- Multi-level, modular structure
- Quick clamping device
- Low maintenance operation
- Energy-efficient

R&R BETH FILTRATION

P.O Box 43054 Atlanta, GA 30336 USA

Tel: +1 (251) 243-7039

Fax: +1 (251) 243-0004


e-mail: office@rr-bethfiltration.com

Oil Mist Separator AOM/AOS

Clears all types of haze

Functionality of the filter technology

<p>Filter with demister technology</p> <p>The single level demister are mainly used for coarser drop spectra. The level can be regenerated, i.e. used with backwashing, depending on the solid matter and the lubricant volume.</p>
<p>Filter with multi-level storage technology</p> <p>The multi-level storage filters are used in a wide range of drops and are characterised by extremely high and constant separation yields. The special filter cartridges with inserted drainage elements provide a long service life, even with higher quantities of lubricants.</p>
<p>Dry filter with pressure surge-controlled cleaning</p> <p>Dry filters are used when the droplets deposit onto the solid matter causing no further droplets to reach the filter. These filters are equipped with filter pockets, which can be cleaned off using pressure surges (see AAS series)</p>

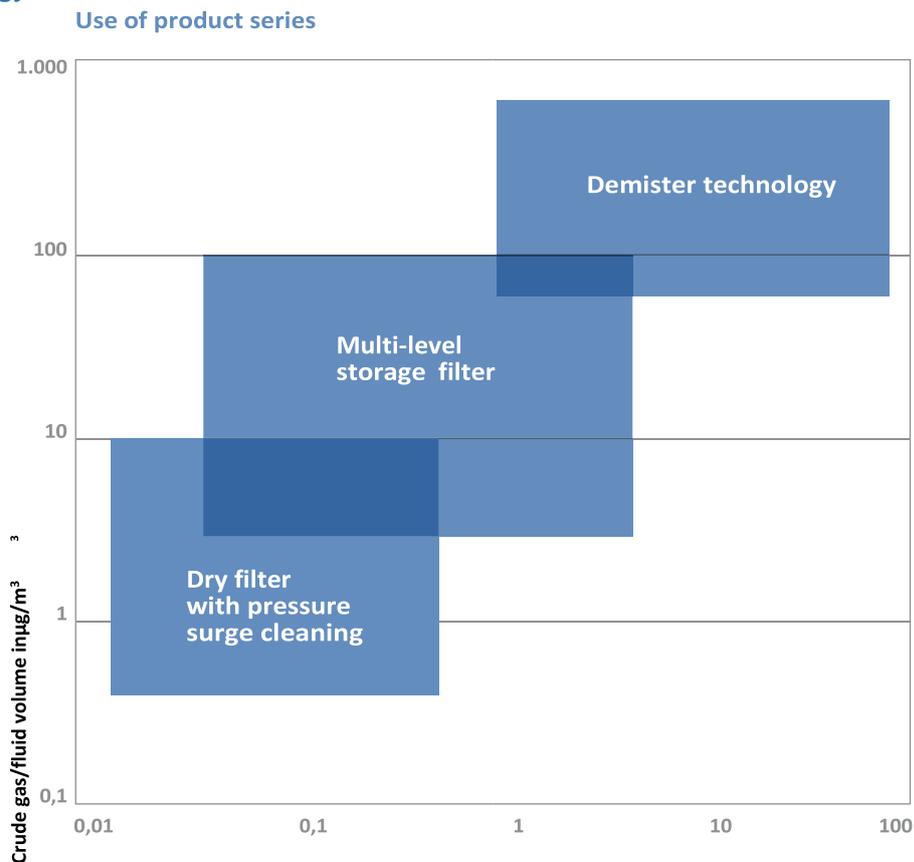

Operating Limits

Filter type	Crude gas concen. Of liquid	Pure gas concen. of liquid	Drop spectrum	Qty of solid matter	Particle size
Demister	> 150 mg/m ³	< 20 mg/m ³	> 2 µm	< 1 g/m ³	> 2 µm
Storage filters	< 150 mg/m ³	< 2 mg/m ³	> 0,3 µm	< 1 g/m ³	> 0,3 µm
Dry filters	< 10 mg/m ³	< 2 mg/m ³	> 0,3 µm	< 100 g/m ³	> 0,3 µm

Quick clamping device

bg filtration oil mist separators work with a quick-clamping device on the filter cartridges; when used for multi-level tasks, a device is also used which ensures a safe seal and simplifies and minimises the cost of maintenance and the replacement of the cassttes.

Safety

Precautions such as monitoring the extract air volume, avoiding sources of ignition, monitoring the temperature, having an earthing concept and using fill level sensors in the are used to avoid explosive atmospheres. If such an occurrence cannot be excluded, there ist he possibility of also supplying pressure-resistant.

R&R BETH FILTRATION

P.O Box 43054 Atlanta, GA 30336 USA

Tel: +1 (251) 243-7039

Fax: +1 (251) 243-0004

e-mail: office@rr-bethfiltration.com